

www.accuscreed.com

sales@accuscreed.com




MegaScreed[®] is specifically designed for slab on grade applications, and is compatible with most industrial finishing equipment. Though primarily for slab on grade applications, but can also be used during the base grading for pavers and decorative stone. Whether hand striking, using a vibratory screed, or heavier truss screed, Contractors enjoy superior end results with substantial savings over other screeding methods. MegaScreed[®] is three times faster than conventional methods.

Products are available to fit over #4 (1/2") and #5 (5/8") rebar stakes. Our new 15mm Yoke is the solution whether using domestic or foreign rebar.

USAGE FOR SLAB ON GRADE

- 1. Determine the desired concrete elevation with either a laser or a string line. Then, position a #4 or #5 rebar stake on the subgrade at the strike off point.
- 2. Place the MegaScreed® Driver over the rebar and strike with the Deadblow Hammer until the height indicator aligns with the laser or string line.
- 3.) Remove the Driver and place the high strength, brightly colored nylon Yoke on the top of the rebar stake. The Yoke will maintain the exact position indicated by the height indicator. Repeat this procedure at each screed location.
- 4.) Set 1-1/2 " I.D. app. 2" O.D. (Schedule 40 pipe) on top of Yokes and you are ready to pour. Our nylon Yokes will not expand, contract, or deteriorate; and are designed to be left in the pour.

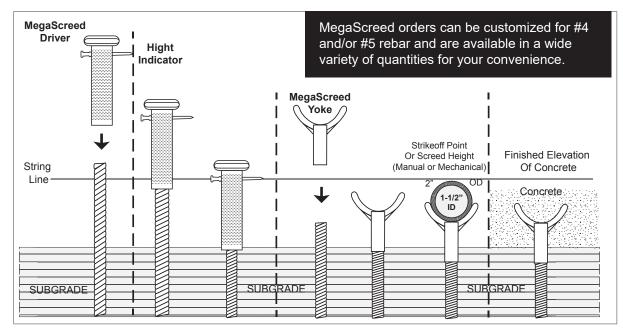

2332 Eastern Ave #2 | Davenport, IA 52803 | P: 800-937-5234 | F: 563-322-6470